



OUT-LOOK

Waterproof, pet immune, dual technology outdoor/indoor intruder detector with adjustable pet immunity / creep zone. Includes Anti-masking and shock & vibration sensors.

Ultra reliable
outdoor/indoor detector




INTRODUCTION

OUT-LOOK detector provides highly reliable movement detection and ensures excellent protection against any attempt to disable its operation by blocking (masking) its near field-of-view or when the detector has been covered, whether the alarm system is Armed or Disarmed ("Anti-masking").



OUT-LOOK detector equipped with two lenses. One lens in its front while the other is at its lower part. By adjusting the lower lens internal mechanism, it is possible to set the pet immunity (creep zone) detection sensitivity.

All detectors' features can be adjusted by a Remote Control (Obtained separately).

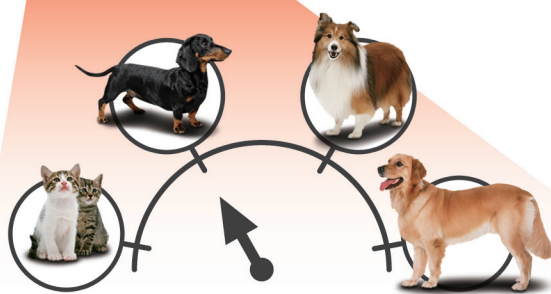

Selectable Pet Immune

DESCRIPTION

- Dual Technology : PIR sensors plus Microwave sensor.
- Adjustable pet immunity / creep zone detection sensitivity.
- Anti-masking.
- Anti-vandalism sensor (Shock & Vibration sensor).
- Waterproof and all weather resistance.
- Remote controlled : Detector settings can also be controlled by Remote Control (Obtained separately).
- Auto temperature compensation.
- Multi-directional Mounting BRACKET (Obtained separately).

SPECIFICATIONS

Model	OUT-LOOK
Power Supply	12V DC
Current Drain	45 mA (Maximum)
Alarm Contacts Endurance	(N.C.) 24V DC / 100 mA (Max)
Masking Contacts Endurance	(N.C.) 24V DC / 100 mA (Max)
Tamper Switch Contacts	(N.C.) 24V DC / 100 mA (Max)
Warm-up Time	60 Seconds
Alarm Time	2 Seconds (Programmable from 1 to 99 sec. by the optional Remote Control).
Response Time To Masking	30 Seconds (Max.)
Anti-masking Relay Activation Time	As long as Masking persists (at least 2 seconds)
Operating Temperature	(-)37°C ~ 70°C (-4°F ~ 158°F)
Dimension (mm)	68(W) x 123(H) x 50(D)

* All Specifications / colors are subject to change without notice. (V.01)