

# CHE-9411

Dome Camera




## Features

- ❖ High Sensitive 1/3" HR Color CCD
- ❖ Resolution 540 TV lines
- ❖ Build-in Fixed Lens 3.6mm
- ❖ Min. Illumination : 0.6 Lux
- ❖ ATW, AGC, BLC
- ❖ Easy & Fast Installation



## Dimensions

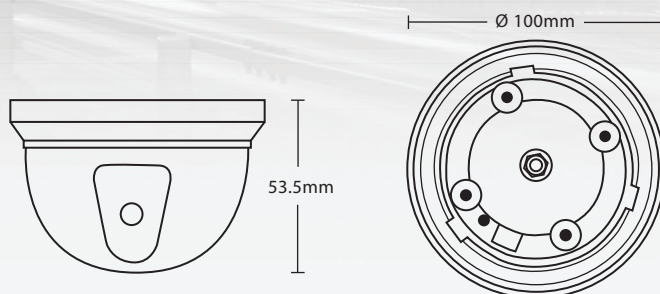

LCC-MB204  
(Optional Bracket)



## Specifications



Model	CHE-9411
Image Device	1/3" HR Color CCD
Lens	Standard 3.6mm at F=2.0
Effective Pixels	PAL: 752(H) x 582(V) NTSC: 768(H) x 492(V)
Horizontal Resolution	540 TVL
Scanning System	625Lines(PAL), 525Lines(NTSC) 2:1 interlace
Scanning Frequency	PAL: 15.625KHz (H), 50Hz (V) NTSC: 15.734KHz (H), 60Hz (V)
Synchronization	Internal
Minimum Illumination	0.6Lux at F=2.0
S/N Ratio	More than 48dB (AGC off)
Video Output	1 Vp-p, 75Ω Composition, BNC x 1
Electronic Shutter	PAL: 1/50 to 1/100,000 sec. NTSC: 1/60 to 1/100,000 sec.
White Balance	Auto Tracking White Balance
Back Light Compensation	On
Auto Gain Control	Build-in
Power Supply	DC 12V ± 10%
Operating Temperature	-5°C to 45°C
Operating Humidity	90% RH Max.
Dimension(mm)	Ø 100 x 53.5(H)
Weight	158g

\* All Specifications / colors are subject to change without notice. (V.01)