

**Digital**

《High Reliable intelligent Quad Series》


# Quad-Beam Active Infrared Sensor

LK-60HQ (Outdoor 60m)

LK-110HQ (Outdoor 110m)

LK-160HQ (Outdoor 160m)

LK-200HQ (Outdoor 200m)

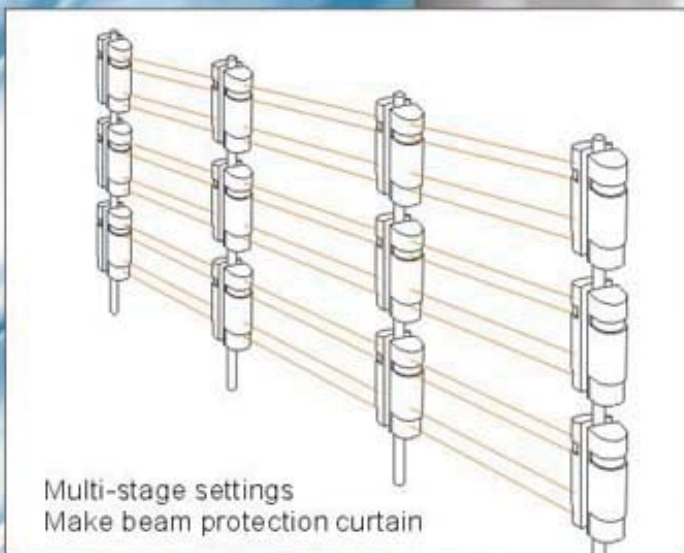


LED level meter for beam alignment. Three LEDs on the receiver act as a level meter to visually display the beam reception level. 10-level LED indicator enable quick and accurate beam alignment.


## Features

1. Quad Beam detection.  
Four synchronized pulsed infrared beams ensure ultimate stability in any applications.  
False alarms due to falling leaves and small animals are virtually eliminated.
2. Easy optical alignment with LED indication
  - ⊙ 10-level LED indicator which can be checked the beam strength easily.
  - ⊙ Highly accurate alignment with no need to use a voltmeter.
  - ⊙ No need for beam blocking plate.
3. Selectable 8-channel beam frequencies.  
Selectable beam frequencies for beam stacking and long distance applications without crosstalk.

### Beam stacking applications




### Long distance applications

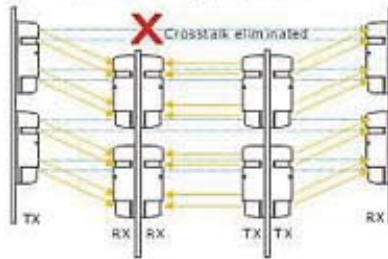

4. Up to 4-sets for multiple installation.
5. Adjustable beam interruption period (50-700 msec)
6. Lighting & Surge protection. Automatic gain control circuit.
7. Form C relay providing more applications.
8. Anti-Frost design.


## Dimensions

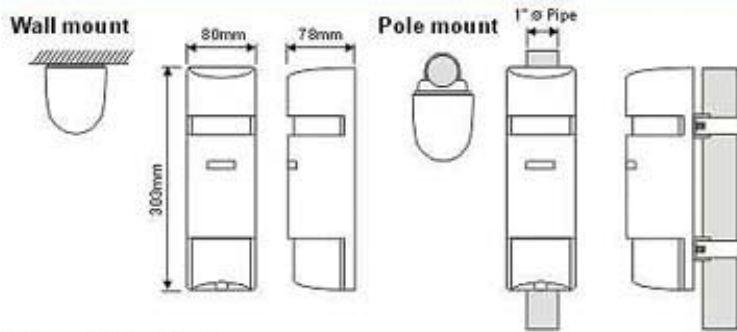

## Specification


Model	LK-60HQ	LK-110HQ	LK-160HQ	LK-200HQ
Coverage outdoor use	60 m	110 m	160 m	200 m
Infrared beam	4-Beams(4 beams simultaneous interruption alarm activated)			
Selectable beam frequency	CH1 ~ CH8 8 channels			
Response time	50~700msec (variable)			
Power input	11~30VDC (no polarity)			
Power consumption (at 12VDC input)	70 mA	80 mA	90 mA	100 mA
Indication LED	Power LED : RED LED (transmitter) / ALARM LED : RED LED (receiver) BEAM alignment level LED : 3 RED LEDS (receiver)			
Alarm duration	1 ±0.5sec			
Relay output	Form C relay dry contact, 1A/120VAC, 2A/24VDC (resistor load)			
Tamper	open when cover is removed (1A/120VAC)			
Alignment angle	Vertical 20° (±10°), horizontal 180° (±90°)			
Mounting	Wall mount or pole mount			
Operation temperature	-25°C ~ +55°C			
Weight	1310 g			
Accessories	Wall mount screw (8 pcs), pole mount screw (8 pcs), metal mounting bracket (2 pcs), mounting hook (4 pcs), U-clamp (4 pcs)			

The specifications are subject to change without notice.

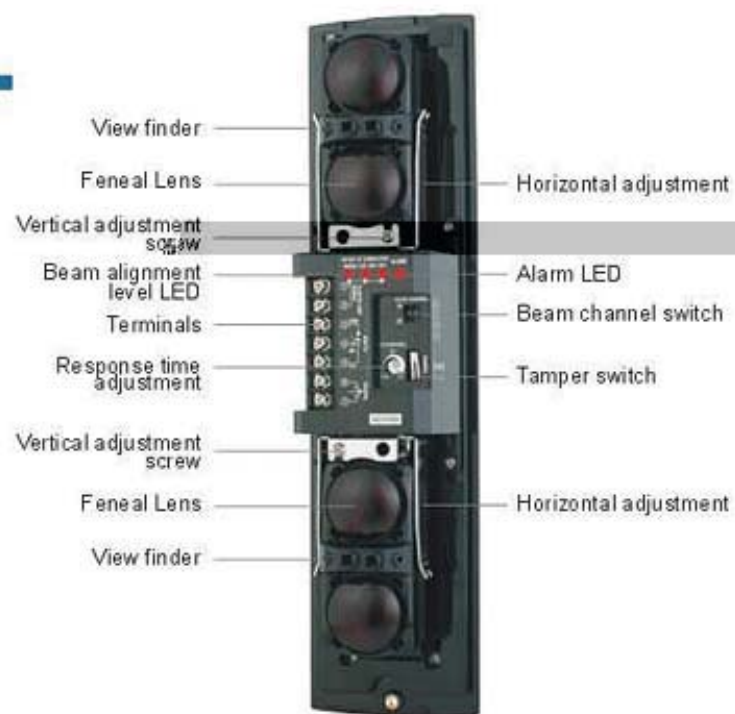


## Terminals

### Transmitter

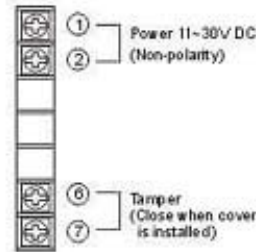

### Receiver



## Detection Range

