



# Loop Detector for Car Park System


## LK-101



### Specifications

Model	LK-101
Self-tuning range	50 to 1000 $\mu$ H
Sensitivity	Four step switch selectable
Filter	Switch selectable 2 Second filter
Presence Relay	Fail-safe
Pulse Relay	Switch selectable: Pulse on detect Pulse on undetect
Response Times	10 ms
LED Indicator	Power (Red) / Detect (Green)
Relay Rating	5A @ 230VAC
Power requirements	230V AC $\pm$ 15%
Operating Temperature	-20 $^{\circ}$ C to 65 $^{\circ}$ C
Mounting Postion	Shelf or DIN rail mounting
Connections	11-pin submagnal type
Dimension (mm)	40(W) x 78(H) x 78(D) 40(W) x 78(H) x 108(D) (with connector)

### Dimensions

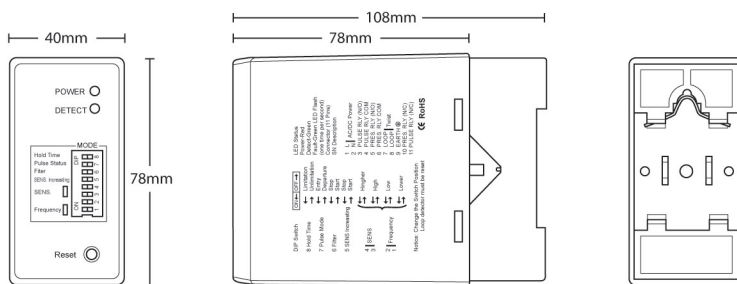

\* All Specifications / colors are subject to change without notice. (V.03)