




# Digital Loop Detector

## LD-161

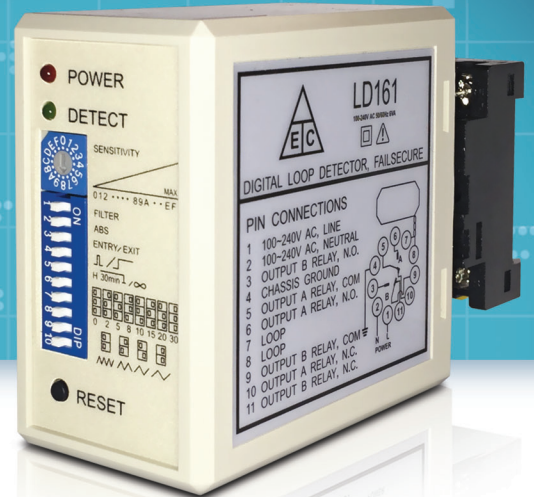


### Specifications

Model	LD-161
Input Power	100-240VAC
Sensitivity	16 Levels Selectable
Relay Output	220-240VAC / 3A
Indicator	Red LED indicate Power status, Green LED indicate Loop
Connector	PF113A
Frequency	40 - 80KHz
Operation	Temperature -40 ~ 85°C Humidity 5% ~ 95%
Storage	Temperature -55 ~ 125°C Humidity 5% ~ 95%
Dimension (mm)	42(W) x 75(H) x 110(D)
Weight	200g

### Pin Connections

- 1 100~240VAC, LINE
- 2 100~240VAC, NEUTRAL
- 3 OUTPUT B RELAY, N. O.
- 4 CHASSIS GROUND
- 5 OUTPUT A RELAY, COM
- 6 OUTPUT A RELAY, N. O.
- 7 LOOP
- 8 LOOP
- 9 OUTPUT B RELAY, COM
- 10 OUTPUT A RELAY, N. C.
- 11 OUTPUT B RELAY, N. C.

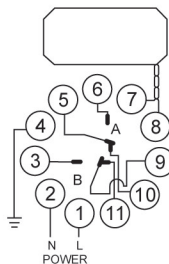

\* All Specifications / colors are subject to change without notice. (V.00)