

PH-716SD

Pin Hole CCD Camera




Features

- ❖ 1/4" Sharp Color CCD
- ❖ Normal Resolution (420 TV lines)
- ❖ Build-in Fixed Lens (f=6mm)
- ❖ Min. Illumination : 0.1 Lux
- ❖ Auto Tracking White Balance
- ❖ Unobtrusive PIR detector housing design
- ❖ Easy & Fast Installation



Dimensions

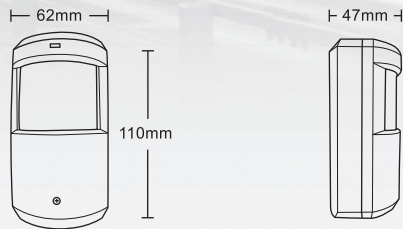

Specifications



Model	PH-716SD
Image Device	1/4" SHARP Color CCD
Effective Pixels	PAL: 500(H) x 582(V) NTSC: 510(H) x 492(V)
Horizontal Resolution	420 TVL
Scanning System	625Line(PAL), 525Lines(NTSC) 2:1 interlace
Scanning Frequency	15.625KHz (H), 50Hz (V)
Synchronization	Internal
Minimum Illumination	0.1 Lux. @ F1.2
S/N Ratio	More than 48dB (AGC off)
Video Output	1 Vp-p, 75Ω Composition, BNC connector
Electronic Shutter	PAL: 1/50 to 1/100,000 sec. NTSC: 1/60 to 1/100,000 sec.
White Balance	Auto Tracking White Balance
Auto Gain Control	Built in
Power Supply	DC 12V
Operating Temperature	-5°C to 45°C
Operating Humidity	80% RH Max.
Dimension (mm)	47(L) x 62(W) x 110(H)
Weight	100g

* All Specifications / colors are subject to change without notice. (V.01)