

PH-516SD

Pin Hole CCD Camera




Features

- ❖ 1/3" Inter Line Transfer CCD
- ❖ Advanced Miniature Technology
- ❖ Ultra Compact Size
- ❖ Ideal For Covert Operations
- ❖ Integral Mounting Bracket



Dimensions

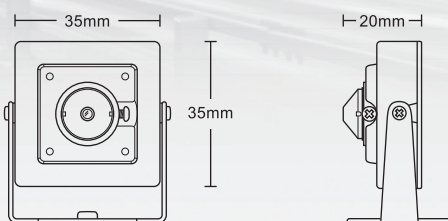

Specifications



Model	PH-516SD
Pick Up	1/3" Inter Line Transfer CCD
Image Signal Process	Digital Signal Processing System
Number Of Pixel	NTSC : 510(H) x 492(V) PAL : 500(H) x 582(V)
Horizontal Resolution	Max. 480TV Lines
Sync System	Internal
Auto Gain Control	Yes
White Balance	Yes
Back Light Compensation	Auto
Scanning System	2:1 interlace
Electronic Shutter	NTSC : Auto (1/60 sec to 1/10000 sec) PAL : Auto (1/50 sec to 1/10000 sec)
S/N Ratio	Max. 48dB
Sensitivity	0.1 Lux
Video Output Signal	1 Vp-p Composite Video Output, 75 Ohms
Power Supply	DC 12V
Power Consumption	180 mA
Lens Mount	3.7mm Lens
Operation Temperature	-10°C ~ +50°C
Dimensions (mm)	35(W) x 35(H) x 20(D)
Weight	Approx. 50g

* All Specifications / colors are subject to change without notice. (V.01)