

# WTX-1200A

Control Keyboard




## Features

- ❖ Controls from 1 ~ 255 cameras
- ❖ Multiple protocol supported in each channel
- ❖ RS-485 / RS-422 communication (Tx: 3 port, Trx: 1 port)
- ❖ Programmable user preferences (preset, tour, group, etc.)
- ❖ Built-in 3-Axis proportional joystick
- ❖ Easy upload programmed data via serial communication port of PC
- ❖ Built-in 2 lines character LCD
- ❖ User password support
- ❖ Designed for desktop use
- ❖ Programmable transmission speed for each ID (2.4~57.6kbps)



## Dimensions

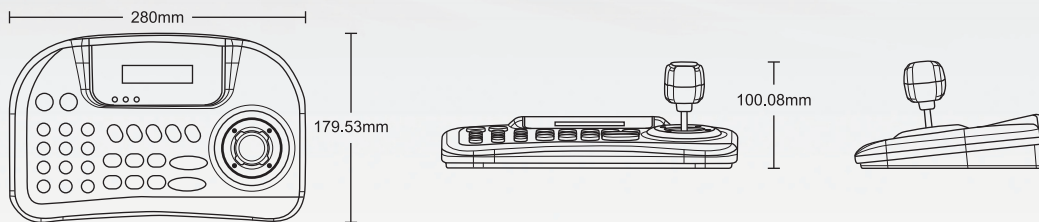

## Specifications

Model	WTX-1200A
Keyboard Communication	Interface: RS-485 (Tx 3 port, Trx 1 port) Pan/ Tilt operating distance: 4700 ft (1029m) No 24 AWG wire Protocol: Multiple (Pelco-d, etc.) (Baud rate selectable)
Connector Type Data	TERMINAL BLOCK(8p)
Keyboard Keypad	Rubber button Numeric keypad and camera function key
Joystick	Stick 3-axis, variable speed with zoom
Input Voltage	12V DC or 9V batt (battery mode)
Power Consumption	Max. 140mA
LCD Display	Graphic display: 16 x 2 Graphic display
Operating Temperature	0° to 45°
Humidity	10% - 70% non-condensing
Dimension (mm)	280(W) x 179.53(D) x 100.08(H)
Weight	Net: 0.7kg Gross: 1.7kg
Packing include	WTX-1200A KEYBOARD, ADAPTOR Packing include: BATT 9V (Alkaline), USB CABLE, MANUAL, TERMINAL BLOCK(8p)

\* All Specifications / colors are subject to change without notice. (V.01)