

DVR-3000 Plus Series




Features

- ❖ SMICT compression with watermarking
- ❖ Real-time Display & 200fps Recording Interval
- ❖ Alarm, Pre-alarm, Watch dog, PTZ/ Dome, Motion, Video Loss Detection, E-map function etc.
- ❖ Remote Alert Function : Telephone, Paper, Email & Remote Site DVR System
- ❖ External Storage device compatible



Dimensions

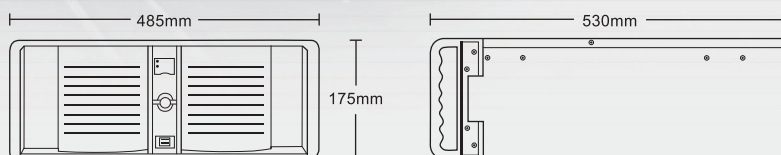

Specifications



Model	DVR-3008 Plus	DVR-3016 Plus
Video input (BNC)	8	16
Audio input (RCA)	8	16
Display Speed (fps)	NTSC: 240 PAL: 200	NTSC: 480 PAL: 400
Record Speed (fps)	NTSC: 120 PAL: 100	NTSC: 240 PAL: 200
Recording Resolution (Pixel)	640 x 480 (NTSC) / 704 x 576 (PAL)	
Compression Format	SMICT (Super Motion Image Compression Technology)	
Compression Rate	Dynamic compression rate = 40:1~2400:1 (Automatic changes depends on the image movement)	
Recording Mode	Recycle recording mode / Program recording mode (Schedule recording per each camera) / Detection area alarm triggering recording and alarm mode.	
Watch dog	Automatically restarts the computer and run checol program at the set time when the system crashed.	
Alarm Function	Motion image trigger alarm / Sensor input trigger alarm / Video loss trigger alarm	
Pre-Alarm Function	Record the images before motion image activate recording.	
Alarm Log	Record the alarm activated time. And to playback the images by choosing the recoding time directly.	
Remote Alarm Alert	Captured Alarm file can be send to the preset remote computers or emails / Phone or mobile phone sound alert, pager number alert. (Optional)	
I/O Functions	Provide multi input sensor/output port for I/O control. (Optional)	
PTZ / Dome Functions	RS-232 (Move up, down, left, right, zoom in/out, iris and focus, preset point setting and control, auto pan function, and the cruise function.)	
E-map Function	Provide controllable e-map to locate the camera.	
Network Function	Provide connections for different network through LAN or Internet to remote one or multi systems.	
Live Audio Monitoring, two way intercommunication	Activate both cameras audio recording functions and select "Live audio" from the host setup menu to get live audio monitoring and two way intercommunication.	
Remote Live Image	Remote access and record the live image from the other host system and the remote site can also record images.	
Remote Search Function	Search for the images information, snapshots and printing function from the far end hard disk.	
Digital Zoom Playback Function	When playback the record files, zoom functions of the selected area is available.	
Backup Function	Direct backup to DVD-RW / CD-RW	
Watermark	Support	
Dimension (mm)	530(L) x 485(W) x 175(H)	

* All Specifications / colors are subject to change without notice. (V.02)