




DIMENSIONS



REAR PANEL

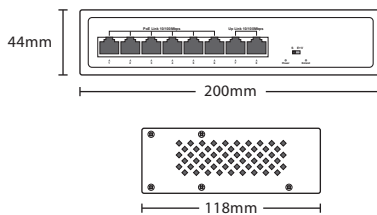

FEATURES

- 6*10/100mbps PoE port, 2*10/100mbps UP Link port
- 250m Distance
- Support IEEE802.3AF/AT
- Whole Power : 75W (52V 1.5A)
- Each port max. Power supply reached 30W
- All port supported by MDI/MDIX auto flip and self negotiation.
- Support IEEE802.3x flow control for Full-duplex mode and backpressure for Half-duplex mode.
- Supply 6*10/100Mbps adaptive high speed forwarding data packet non-lost port.

SPECIFICATIONS

Model	CL-F0420FBL
Product	6 port PoE Switch
Interfaces	6*10/100 BASE-T ports 2*10/100 BASE-T Uplink ports
PoE Port	1 to 6 support IEEE802.3AF/AT Standard
Output Power	15.4W/30W IEEE802.3af/at
Power Pin	Both 1/2+, 3/6- and 4/5+7/8-
Whole Power	≤75W (52V 1.5A)
PoE Protocol	IEEE 802.3af/IEEE 802.3at
PoE Type	End-span
Power Distance	250M
Network Standard	IEEE 802.3, IEEE802.3u, 802.3x, 802.3af/at
Network Medium	10/100BASE-TX : 5 class and above non shielded twisted pair
Data Distance	≤100m
Switch Capability	1.6 Gbps
Forwarding Mode	Store and forward
Forwarding Rate	10BASE-T : 14880PPS/port 100BASE-tx : 14800pps/port
MAC Address	MAC Address MAC address table 1K
Port Function	Power priority mechanism, fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode
LED Indicator	LINK/ACT.100Mbps ; PoE Status Indicator ; Power indicator ; Extender
Working Environment	Working temperature : -10°C to 55°C
Dimension(mm)	200(W) x 44(H) x 118(D)
Weight	Approx. 600g