



# CAR PARK SYSTEM




## WD-055 Series Standard Car Park Barrier

### Features

- ▶ Diversified barrier bars with different length available, up to 5 meters maximum, which offers wide scope of application.
- ▶ Barrier bar in smooth and reliable lifting or falling.
- ▶ Machine core with strong and double springs, make the machine core works more steadily.
- ▶ Die-casting aluminum alloy motor, precise and good at thermal radiation.
- ▶ 3, 6 seconds lifting / falling time.
- ▶ Diversified housing, suitable to different environments and places.
- ▶ Support infrared photocell for anti-bumping function and vehicle loop detector. (optional)
- ▶ Traffic Light interface (AC220V, can support lamp with 40W)

### Specifications

Model	WD-05S4	WD-05S5
Length of Barrier Bar (M)	3 - 4	5
Materials of Barrier Bar	Aluminum square pipe	
Lifting/ Falling Time	3 sec	6 sec
Operating Voltage	220±10% VAC 50 Hz	
Power	200w	
Mean Times to Failure	≥ 2.5 million times	
Ambient Temperature	Normal Model : -15°C to +60°C Low Temperature Model : -40°C to +60°C	
Case Dimension (mm)	335(W) x 925(H) x 285(D)	
Case Weight	40 kg	
Barrier Arm Weight	4 kg	5 kg

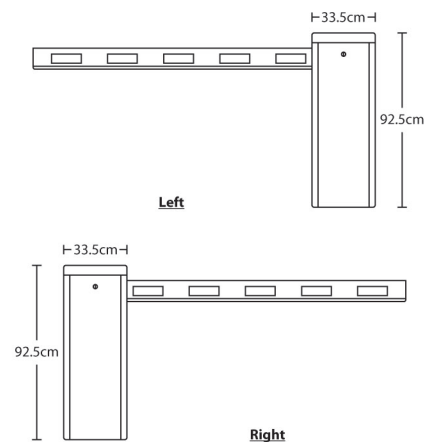

\* All Specifications / colors are subject to change without notice. (V.00)



### CHECOL TECHNOLOGY LIMITED

TEL / FAX + (852) 2560 7011 / + (852) 2535 6388  
 EMAIL mail@checol.com  
 ADDRESS G/F, 57 King Yip Street, Kwun Tong, Kowloon, HK

