

# CHE-BZ360

Day & Night Zoom Camera




## Features

- ❖ High Sensitive 1/4" SONY Double Scan EXview HAD CCD
- ❖ High Resolution (550 TV lines)
- ❖ Min. Illumination : 0.3 Lux @ color / 0.1 Lux @ b/w
- ❖ 27x Optical Power Zoom Lens
- ❖ 10x Digital Zoom (270x zoom)
- ❖ True Day & Night with ICR Mechanism
- ❖ OSD (ON Screen Display)
- ❖ Built in Auto Focus / Auto Iris
- ❖ RS-485, RS-232C TTL protocol compatible



## Dimensions

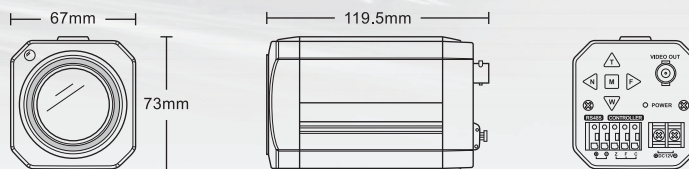

## Specifications



Model	CHE-BZ360
Image Device	1/4" SONY Double Scan EXview HAD CCD
Lens	27x Optical Zoom Lens (f=3.43~92.7mm, F1.6~F3.8)
Effective Pixels	PAL: 752(H) x 582(V) NTSC: 768(H) x 494(V)
Horizontal Resolution	550 TVL
Scanning System	625Line(PAL), 525Lines(NTSC) 2:1 interlace
Scanning Frequency	PAL: 15.625KHz (H), 50Hz (V) NTSC: 15.734KHz (H), 59.94Hz (V)
Synchronization	Internal / Line-Lock
Minimum Illumination	0.3Lux @ color mode ; 0.1Lux @ b/w mode (30 IRE @ Wide End, AGC Super, DSS Off)
S/N Ratio	More than 50dB (AGC off)
Video Output	1 Vp-p, 75Ω Composition, BNC x 1
Electronic Shutter	PAL: 1/50 to 1/100,000 sec. NTSC: 1/60 to 1/100,000 sec.
Camera Control	A/D KEY, RS-485, RS-232C TTL, PTZ Controller
OSD (On Screen Display)	Built-in
White Balance	ATW / Indoor / Outdoor / Push Auto / Manual (R Gain, B Gain) / AWB
Back Light Compensation	Off / On (Level Adjustment, Area Selection)
Auto Gain Control	Off / Low / Mid / High / Super
Day & Night	True Day & Night with ICR Mechanism (Auto / Color / B/W / External)
Aperture Control	Auto Focus / Auto Iris
Power Supply	DC 12V
Operating Temperature	-10°C to 50°C
Operating Humidity	80% RH Max.
Dimension (mm)	67(W) x 73(H) x 119.5(D)
Weight	Approx. 502g

\* All Specifications / colors are subject to change without notice. (V.02)