

CHE-Mini10XHD


2 Mega Mini PTZ Camera



Features

- 10x Optical Zoom (32x Digital Zoom)
- 1/2.8 2M "Exmor" CMOS Image Sensor
- CE, FCC, RoHS, KC Compliance

Dimensions

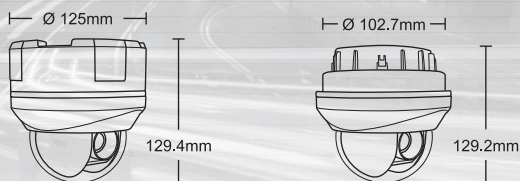

Surface Mount



Flush Mount



Wall Mount
(Optional Bracket)



Ceiling Mount
(Optional Bracket)

Specifications



Model	CHE-Mini10XHD
Image Sensor	1/2.8 2M "Exmor" CMOS Image Sensor
Picture Elements	2,140K Pixels
Zoom	10x Optical Zoom (32x Digital Zoom)
Focal Length	F1.6~F3.5, f=4.7mm~94.0mm
Focus Position	10mm(Wide) ~ 1000mm(Tele)
Angle of View	Horizontal: 59.5°(Wide end) ~ 3.3°(Tele end)
Minimum Illumination	0.001 lux (ICR ON 1/4 sec, 30% High Sensitivity Mode ON)
S/N Ratio	50 dB
AE Mode	Auto / Manual / Shutter Priority / Iris Priority
Gain Control	0dB~+47.8dB (16 levels)
Shutter Control	1/1 sec to 1/10000 (22 levels)
White Balance	Auto / ATW / Indoor / Outdoor / One push / Manual
Digital Noise Reduction	On / Off
Day & Night	Auto / Color / B&W
Backlight Compensation	On / Off
Wide Dynamic Range	On / Off / Auto
Video Output	AHD(BNC Type) and CVBS(BNC Type)
Resolution	1920x1080p / 30fps, 25fps ; 1280x720p / 60fps, 50fps
Pan / Tilt Angle	PAN: 360°(Endless) / TILT: -2°~182°
Pan Speed	Manual: 0.1°~400°/sec (Zoom Proportional)
Preset Speed	Max. 400°/sec
Preset Position	256 Preset Positions
Tour	8 Groups (Max 30 Entries for each Group)
Scan	8 Scans
Pattern	8 Patterns (Approx. 2 Minutes for each Pattern)
Flip	Auto Flip (On / Off)
Communication	RS485 (2400, 4800, 9600bps(Default), 38400)
Camera ID	255
AHD Output	1920x1080p
OSD	On / Off
CVBS Output	720x480
Port	RS-485 for PTZ Control
Protocol	Pelco-D, Pelco-P
Alarm Input	4 Alarm Inputs
Alarm Output	1-Relay Out (N.O)
Certifications	CE, FCC, RoHS, KC
Color	Ivory
Power Source	AC24V 2A (DC12V 2A)
Operating Humidity	Up to 90% RH
Operation Temperature	0°C~50°C (32°F~122°F)
Dimension (mm)	Ø125 x 129.4(H) (3.5" Bubble)
Weight	Approx. 780g

* All Specifications / colors are subject to change without notice. (V.01)