

# CHE-VGA01

## VGA Converter





### FEATURES

- Support DVR by VGA Output
- Output Resolution up to 1024 x 768 @ 60Hz
- Easy Installation
- N / P Video System Auto Detection

### SPECIFICATION

| Specification     | VGA01  |
|-------------------|--|
| Connection        | DVR Side: D-Sub<br>LCD Monitor Side: D-Sub   |
| Function          | 1. Output Resolution Up to 1024 × 768@60Hz<br>2. Analog non-interlaced RGB Output Supported<br>3. NTSC / PAL System Auto Detection |
| Power             | Provided by DVR  |
| Power Consumption | 2 W  |
| Dimension (mm)    | 87 (L) × 64 (W) × 24 (H)   |

### CONNECTION

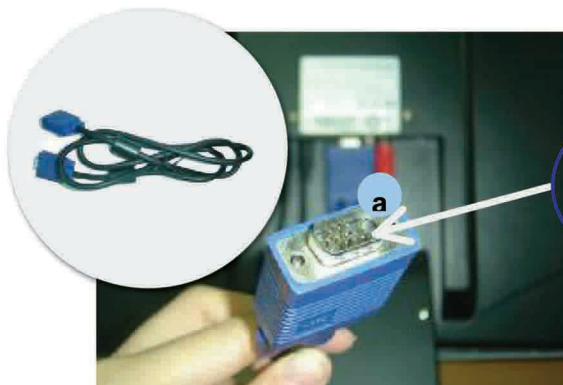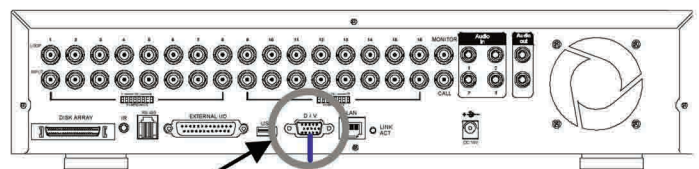

\* All Specifications / colors are subject to change without notice.

### CHECOL TECHNOLOGY LIMITED

TEL / FAX + (852) 2560 7011 / + (852) 2535 6388  
 EMAIL mail@checol.com  
 URL http://www.checol.com  
 Address G/F, 57 King Yip Street, Kwun Tong, Kowloon, HK

