


STANDALONE PROXIMITY READER

CHE-721H4

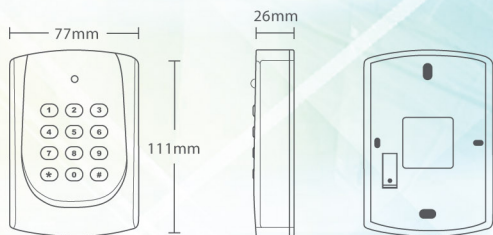

Features

- ▶ User capacity up to 1,024
- ▶ 11 sets of time zone, different time zone for each user.
- ▶ Up to 120 holidays that can be set in a year starting from the editing date.
- ▶ Built-in anti-tamper function.
- ▶ Built-in watchdog to prevent the system from halting.
- ▶ An extra WG port which allows connecting to another WG reader (for exit or anti-pass-back).
- ▶ Event log preserved up to 10 years.

Specifications

Model	CHE-721H4
RF Frequency	125KHz
User Capacity	1024
Event Log	1200
Power Requirement	9 - 16VDC
Power Consumption	12VDC / 100mA
Communication Interface	RS-485
Peak Current	200mA
Baud Rate	9600 bps (N,8, 1)
Access Mode	Card Only / Card or PIN / Card + PIN
Anti-pass Back	Yes
Editing Interface	Keypad / Controller / PC Software
Proximity Reading Range	10 - 18cm (125KHz) / 3 - 8cm (13.56MHz)
Indicator	A bi-color LED and a beeper
Environment	-20°C to 75°C
Dimension (mm)	77(W) x 111(H) x 26(D)
Weight	100g (± 10g)

* All Specifications / colors are subject to change without notice. (V.03)