

401DI16



16-Channel Digital Input Module




Features

- ❖ 16 Channels N.C. Contact Input
- ❖ Loop Condition – Open / Close / Break
- ❖ Input Status LED Indicator
- ❖ RS-485 communication Interface
- ❖ 9600 / 19200 Baud Rate Selectable

Rear Panel

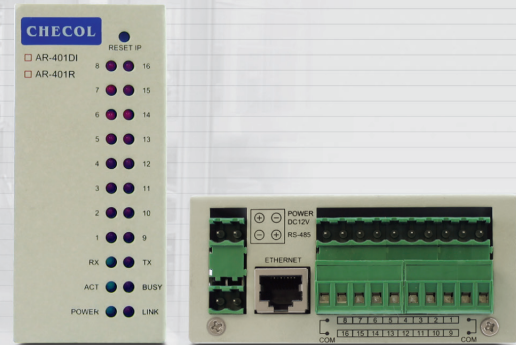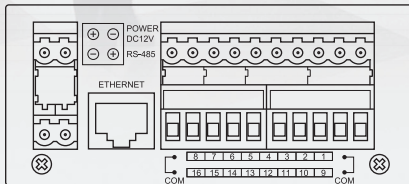

Dimensions

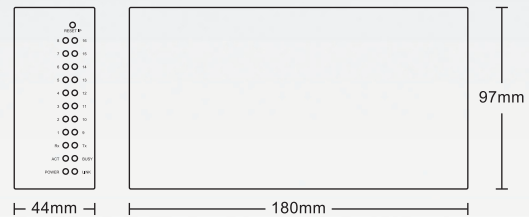

Specifications

Model	401DI16
Power Requirement	9 - 24VDC
Power Consumption	1 W
Communication	RS-485
Baud Rate	4800, 9600, 19200bps (N, 8, 1)
Channel	16 Contact Input (Sink, N.C., Type)
LED Indicator	Power, Tx/ Rx Input Close/ Open/ Break
Open Status	LED OFF
Close Status	LED ON
Break Status	Flash
Material	Metal
Dimension (mm)	44(W) x 97(H) x 180(D)
Weight	600g

* All Specifications / colors are subject to change without notice. (V.02)