

CHE-VR370

Full HD 1080P AHD Zoom Dome Camera




Features

- ❖ AHD 1920(H) x 1080(V) Zoom Camera
- ❖ 1/3" Panasonic 2.1M CMOS Sensor
- ❖ Color : 0.1 Lux, B/W : 0.06 Lux, IR On : 0 Lux @F1.6
- ❖ Optical 3.5X (f3~10.5mm) AF & Max 8X E-Zoom
- ❖ WDR 90dB, D-WDR, 3D/2DNR, Fog Reduction
- ❖ Smart Motion Zoom
- ❖ Day/Night Focus Preset (DNFP)
- ❖ Transmission Distance Compensation Setting
- ❖ Support CoC / UTC / PELCO-D Multi-Coaxial Control Protocol
- ❖ Dual Video Output : AHD / CVBS
- ❖ OSD Menu Control



Dimensions

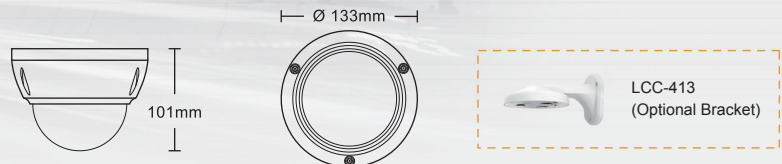

Specifications



Model	CHE-VR370
Image Sensor	1/3" Panasonic 2.1M CMOS Sensor
Resolution	1920(H) x 1080(V)
Frame Rates	1920x1080P@25/30fps
Minimum Illumination	Color: 0.1 Lux, B/W: 0.06 Lux, IR On: 0 Lux @F1.6
Wide Dynamic Range	90dB
Digital Video Output	AHD 1080P
Analog Video Output	CVBS (1.0Vp-p Composite, 75Ω)
Signal to Noise Ratio	More than 50dB (AGC off)
Mechanical IR Cut Filter	Automatically Switches (Switching Lux Level can be adjusted)
IR LED ; Working Distance	24 units (24pcs Hi-Bright) ; 15~20m
OSD Menu	OSD Control / CoC
Title	TITLE (LOCATION)
Day&Night Mode	Color / B&W / Auto / IR SYNC
Electronic Shutter	Auto: 1/25(30)~1/30000 Sec ; Manual: 1/25(30), 1/50(60), 1/100(120), 1/240, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/16000, 1/30000 Sec
Auto Gain Control	0~20 Steps
White Balance	ATW / AWB / PWB (Push Lock) / Manual
WDR ; BLC ; HLC	High (Max 90dB) / Middle / Low / Off ; Program : On / Off
Fog Reduction	Auto/Manual/Off ; Level: High/Middle/Low
Dynamic Noise Reduction	SMART / 2DNR / 3DNR
Sense Up	On (x2, x4, x8, x16, x32) / Off
Language	English, Japanese, Traditional Chinese, Simplified Chinese
E-Zoom	8x
Image Setting	Sharpness / Saturation / Gamma / Mirror / Flip / Black Level
Privacy Zone Mask	16 Zones Programmable
Motion Detection	On: Sensitivity, Programmable / Off
Camera Control Interface	CoC / UTC / PELCO-D
Lens	3.5X Optical Zoom f3.0mm(Wide)~10.5mm(Tele), F1.6
Angle of View	H: 92°(Wide) ~ 29°(Tele), V: 52°(Wide) ~ 16.5°(Tele)
Minimum Working Distance	1 m
Focusing System	Smart Zoom & Auto Focus ; Day / Night Focus Preset
Water Resistance	IP66
Power Supply ; Consumption	12Vdc/650mA ; 7.8W
Operating Temperature	-10°C to 50°C
Operating Humidity	Maximum: RH80%
Dimension (mm)	Ø133 x 101(H)
Net Weight	700g

* All Specifications / colors are subject to change without notice. (V.03)